


## Non-Corrosive 7



- Exceeds performance of standard T5 fluorescent
- Ultra slim IP65 LED NCF linear
- Unique base design caters for multiple installation methods
- Installer friendly imbedded features aid accurate and fast installation for any application
- Quick release LED array / gear tray assembly provides the installer the means to faster installation / maintenance
- Fast latching / permanently located stainless steel side clips ensure a quick and secure connection
- Tridonic LED driver as standard
- Self-test emergency as standard with Li-ion battery technology, reducing charge time and running costs
- LED lifespan L80 B10 54,000 hours

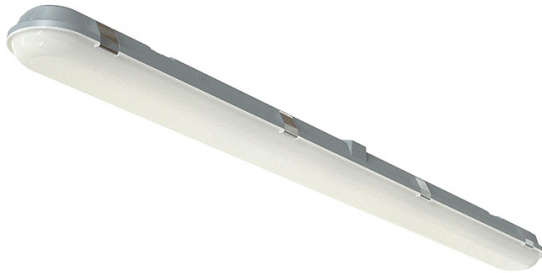

Part Code	Description / Spec							Power	Lumens	Temp
DLNC20	DayLux™ Non-Corrosive 7 20W							20W	2331	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1265mm	Dia	Cutout	
DLNC29	DayLux™ Non-Corrosive 7 29W							29W	3209	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1565mm	Dia	Cutout	
DLNC35	DayLux™ Non-Corrosive 7 35W							35W	3702	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1865mm	Dia	Cutout	
DLNC41	DayLux™ Non-Corrosive 7 Twin 41W							41W	4457	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1265mm	Dia	Cutout	
DLNC61	DayLux™ Non-Corrosive 7 Twin 61W							61W	6314	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1565mm	Dia	Cutout	
DLNC78	DayLux™ Non-Corrosive 7 Twin 78W							78W	8204	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1865mm	Dia	Cutout	
DLNC20/E3	DayLux™ Non-Corrosive 7 20W with Emergency							20W	2331	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1265mm	Dia	Cutout	
DLNC29/E3	DayLux™ Non-Corrosive 7 29W with Emergency							29W	3209	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1565mm	Dia	Cutout	
DLNC35/E3	DayLux™ Non-Corrosive 7 35W with Emergency							35W	3702	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1865mm	Dia	Cutout	
DLNC41/E3	DayLux™ Non-Corrosive 7 Twin 41W with Emergency							41W	4457	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1265mm	Dia	Cutout	
DLNC61/E3	DayLux™ Non-Corrosive 7 Twin 61W with Emergency							61W	6314	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1565mm	Dia	Cutout	



**Non-Corrosive 7 cont.**

Part Code	Description / Spec								Power	Lumens	Temp
DLNC78/E3	DayLux™ Non-Corrosive 7 Twin 78W with Emergency								78W	8204	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1865mm	Dia	Cutout		
DLNC20/DALI/E3	DayLux™ Non-Corrosive 7 20W with DALI Emergency								20W	2331	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1265mm	Dia	Cutout		
DLNC29/DALI/E3	DayLux™ Non-Corrosive 7 29W with DALI Emergency								29W	3209	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1565mm	Dia	Cutout		
DLNC35/DALI/E3	DayLux™ Non-Corrosive 7 35W with DALI Emergency								35W	3702	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1865mm	Dia	Cutout		
DLNC41/DALI/E3	DayLux™ Non-Corrosive 7 Twin 41W with DALI Emergency								41W	4457	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1265mm	Dia	Cutout		
DLNC61/DALI/E3	DayLux™ Non-Corrosive 7 Twin 61W with DALI Emergency								61W	6314	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1565mm	Dia	Cutout		
DLNC78/DALI/E3	DayLux™ Non-Corrosive 7 Twin 78W with DALI Emergency								78W	8204	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1865mm	Dia	Cutout		
DLNC20/DALI	DayLux™ Non-Corrosive 7 20W with DALI								20W	2331	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1265mm	Dia	Cutout		
DLNC29/DALI	DayLux™ Non-Corrosive 7 29W with DALI								29W	3209	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1565mm	Dia	Cutout		
DLNC35/DALI	DayLux™ Non-Corrosive 7 35W with DALI								35W	3702	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1865mm	Dia	Cutout		
DLNC41/DALI	DayLux™ Non-Corrosive 7 Twin 41W with DALI								41W	4457	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1265mm	Dia	Cutout		
DLNC61/DALI	DayLux™ Non-Corrosive 7 Twin 61W with DALI								61W	6314	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1565mm	Dia	Cutout		
DLNC78/DALI	DayLux™ Non-Corrosive 7 Twin 78W with DALI								78W	8204	4000
Driver DALI	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1865mm	Dia	Cutout		
DLNC20/MW	DayLux™ Non-Corrosive 7 20W with Microwave Sensor								20W	2331	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1265mm	Dia	Cutout		
DLNC29/MW	DayLux™ Non-Corrosive 7 29W with Microwave Sensor								29W	3209	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1565mm	Dia	Cutout		
DLNC35/MW	DayLux™ Non-Corrosive 7 35W with Microwave Sensor								35W	3702	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 85mm	Depth	Length 1865mm	Dia	Cutout		
DLNC41/MW	DayLux™ Non-Corrosive 7 Twin 41W with Microwave Sensor								41W	4457	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1265mm	Dia	Cutout		
DLNC61/MW	DayLux™ Non-Corrosive 7 Twin 61W with Microwave Sensor								61W	6314	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1565mm	Dia	Cutout		
DLNC78/MW	DayLux™ Non-Corrosive 7 Twin 78W with Microwave Sensor								78W	8204	4000
Driver Fixed	IP 65	CRI 80	Kg	Height 70mm	Width 115mm	Depth	Length 1865mm	Dia	Cutout		
DLNCSSS	DayLux™ Non-Corrosive 7 Single SS Kit										
Driver	IP	CRI	Kg	Height	Width	Depth	Length	Dia	Cutout		

**Non-Corrosive 7 cont.**

Part Code	Description / Spec						Power	Lumens	Temp
DLNCTSS	DayLux™ Non-Corrosive 7 Twin SS Kit								
Driver	IP	CRI	Kg	Height	Width	Depth	Length	Dia	Cutout

Guarantee and Warranty terms and conditions apply. Cover period starts from date of product supply.